


**Extruded Aluminum 35 Degree Fixed
 Single Deflection Return Grilles & Registers**

Imperial [IP] Dimensions
 Metric (SI) in Parentheses

Silent Zone™, 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (877)945-9175 Fax: (608)845-6504 www.silentzonehvac.com

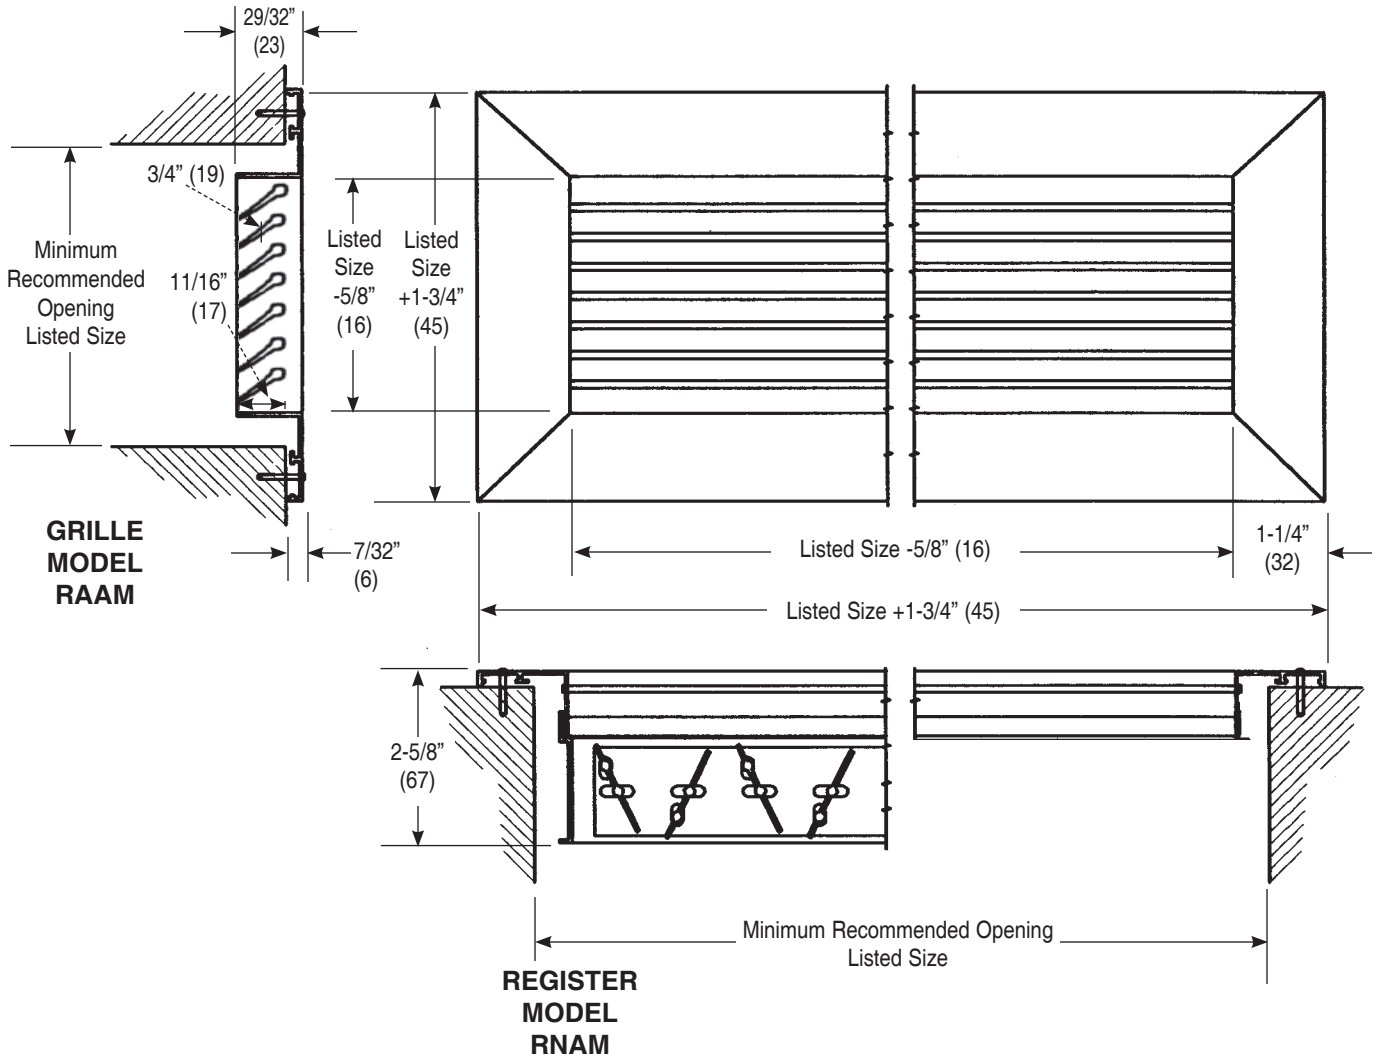

NOTES:

1. Standard screws are #6 x 1 1/4" (32) phillips countersunk screws.
2. Standard color is #11 Bright White. Other colors are available on request.
3. Blades can be aligned either horizontally or vertically, and are individually adjustable.
4. Center mullion is used.
5. Standard sizing is in even inch increments in both dimensions. Odd inch and fractional sizing [in 1/8" (3) increments] is available on request.
6. Aluminum damper is model RXFM opposed blade damper.
7. The standard operator on the damper takes a medium size flat-blade screwdriver.
8. Metric dimensions are given in millimeters.

DIMENSIONS LISTED IN INCHES (In Millimeters)

Model	Damper	Front Direction	Available Sizes*	
			Minimum W x H	Maximum W x H
RAAMH	NA	Horizontal	6x4 (152x102)	48x48 (1219x1219)
RAAMV	NA	Vertical	6x4 (152x102)	48x48 (1219x1219)
RNAMH	Aluminum	Horizontal	6x4 (152x102)	48x48 (1219x1219)
RNAMV	Aluminum	Vertical	6x4 (152x102)	48x48 (1219x1219)

* Minimum and maximum single units sizes.

Larger sizes will be furnished by butting single units together. All butted units will be constructed of even inch sized panels unless otherwise specified. Maximum one piece damper will be 36" x 24". Larger units will have multiple dampers.