


Imperial [IP] Dimensions
Metric (SI) in Parentheses

Silent Zone™, 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (877)945-9175 Fax: (608)845-6504 www.silentzonevac.com

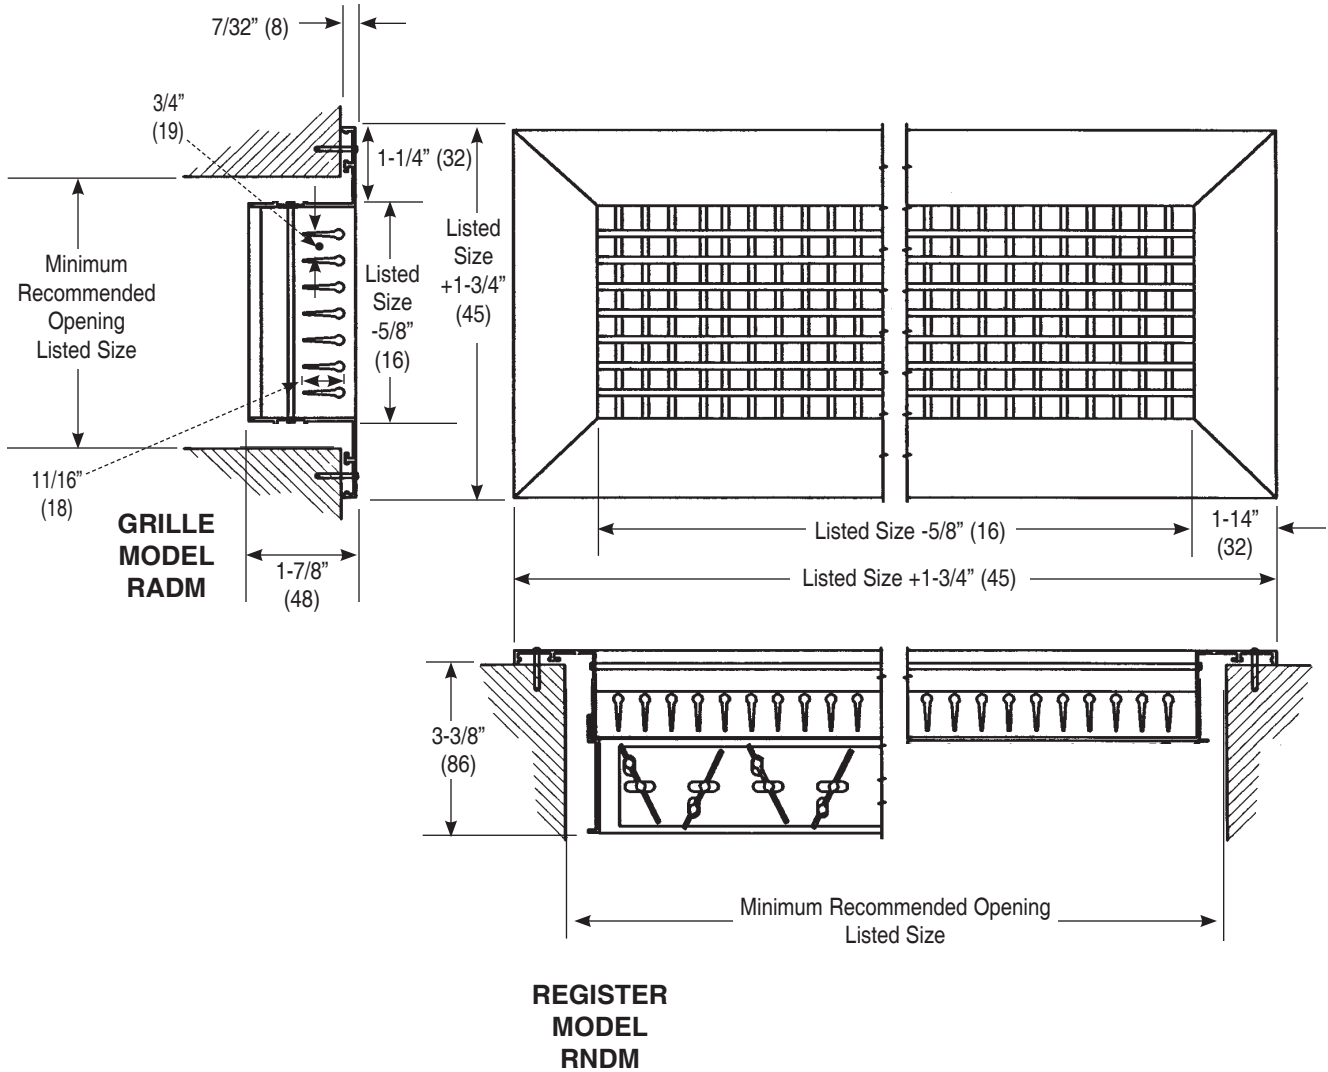

NOTES:

- Standard screws are #6 x 1 1/4" (32) phillips countersunk screws.
- Standard color is #11 Bright White. Other colors are available on request.
- Blades can be aligned either horizontally or vertically, and are individually adjustable.
- Standard sizing is in even inch increments in both dimensions. Odd inch and fractional sizing [in 1/8" (3) increments] is available on request.
- Aluminum damper is model RXFM opposed blade damper.
- The standard operator on the damper takes a medium size flat-blade screwdriver.
- Metric dimensions are given in millimeters.

DIMENSIONS LISTED IN INCHES (In Millimeters)				
Model	Damper	Front Direction	Available Sizes*	
			Minimum W x H	Maximum W x H
RADMH	None	Horizontal	6x4 (152x102)	48x48 (1219x1219)
RADMV	None	Vertical	6x4 (152x102)	48x48 (1219x1219)
RNDMH	Aluminum	Horizontal	6x4 (152x102)	48x48 (1219x1219)
RNDMV	Aluminum	Vertical	6x4 (152x102)	48x48 (1219x1219)

*** Minimum and maximum single units sizes.**

Larger sizes will be furnished by butting single units together. All butted units will be constructed of even inch sized panels unless otherwise specified. Maximum damper will be 36" x 24". Larger units will have multiple dampers.